

COMMON ACCESSORIES



IBT4N
Interface for connecting the O-View programming unit.

Pc./Pack 1



IT4WIFI
Smart Wi-fi interface to manage gates and garage doors by smart-phone (*).

Pc./Pack 1



RBA3
Spare control unit for RB400, RB600/600P, RB1000/1000P and RUN1500/1500P.

Pc./Pack 1



PS124
24 V battery with integrated battery charger.

Pc./Pack 1



RBA1
Inductive limit switch.

Pc./Pack 1



ROA7
M4 rack, zinc coated, 22x22x1000 mm.

Pc./Pack 10



ROA8
M4 rack, 30x8x1000 mm, zinc coated with spacers and screws.

Pc./Pack 10



SOLEMYO KIT
The solar power to automate gates, garage doors or barrier gates.

See page 213.

* Not compatible with the Solemyo kit and PS124


TECHNICAL SPECIFICATIONS

Code	Description	Pack/Pallet
RB600KCE	Kit for the automation of sliding gates up to 600 kg, 24 Vdc, incorporated control unit	14

N.B. The content of the package may vary: consult the retailer.

Code	RB600
ELECTRICAL DATA	
Power supply (Vac 50/60 Hz)	230
Absorption (A)	2,5
Power (W)	515
PERFORMANCE DATA	
Speed (m/s)	0,31
Force (N)	600
Work cycle (cycles/hour)	40
DIMENSIONAL AND GENERAL DATA	
Protection level (IP)	44
Working temp. (°C Min/Max)	-20 ÷ +50
Dimensions (mm)	330x210x303 h
Weight (kg)	11

DIMENSIONS

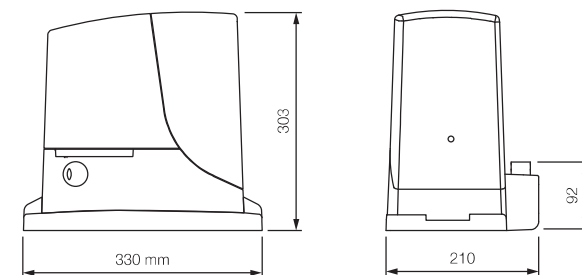

For swing gates

For sliding gates

Barrier gate operator systems

For garage and industrial doors

Control systems and accessories

Compatibility table and alphabetical index

Robuskit 600

For sliding gates weighing up to 600 kg

User-friendly: thanks to the BlueBUS system, allowing the control unit to be connected to up to 7 pairs of photocells and control, security and signalling devices with just two wires.

Practical: control unit and PS124 buffer battery (optional) can be connected by means of a simple connector and can be housed directly inside the motor.

Advanced: RB600 is equipped with a temperature sensor that adapts the motor power to the climatic conditions and at the same time thermal cut-out. A master/slave selection automatically synchronises two motors. This means it is possible to automate 2-leaf sliding gates set opposite each other.

Intelligent: thanks to the obstacle detection system and automatic programming of the working times, Self-diagnosis by means of a flashing light, 8 programming levels.

Safe: acceleration and deceleration can be adjusted at the beginning and at the end of each opening and closing manoeuvre.

Sturdy: base and release in pressure die cast with easy to open handle.

Silent: gear motor on bearings.

The Era Gate accessories, with a minimal, modern and discreet design, renovate Nice kits' style and performance.

Discover the complete range at page 196.



The kit contains:

RB600

1 Irreversible electromechanical gear motor, with incorporated control unit and OXI plug-in receiver which can be used for connections via Nice BlueBUS.



ON2E

1 Transmitter 433.92 MHz, 2 channels.



EPMB

1 Couple of external photocells designed for connection by Nice BlueBUS.



EKS

1 Key selector switch for outdoor installation.



ELDC

1 LED flashing light with integrated aerial.



TS

1 Signboard.

